



DIABOX 187

Made of hot-pressed glassfibre reinforced polyester
 Continuous double seal (a mechanical one in the form of a tongue and groove and another in the form of an inserted EPDM seal)

Two-part construction, split diagonally, lower part for installation of equipment, upper part as lid.

Space saving storage possible

Approved by „Lloyds of Germany“

Hardly inflammable and self-extinguishing

•Colour: similar light grey, RAL7032

•Protection class IP 65

•UV-resistant

•Weight approx 21 kg

Dimensions (approx.)	H x W x D
<input type="checkbox"/> Mounting "vertical"	490 x 960 x 390 mm
<input type="checkbox"/> Mounting "horizontal"	390 x 960 x 490 mm

Heat transition coefficient K	without window	with window
Standard with arctic-PP	1,6 W/K	2,9 W/K

Standard



- SE4** 4 hinges and 4 clasps in stainless steel
- DFVA2** 2 lid propstay in stainless steel, fitted

Optional designs

- FSV** safety glass window, 150x760 mm for mounting "vertical"
- FSH** safety glass window, 150x760 mm for mounting "horizontal"
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0



Accessories (see catalogue and price lists)

View
 Mounting "vertical"

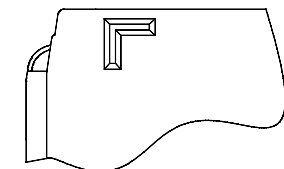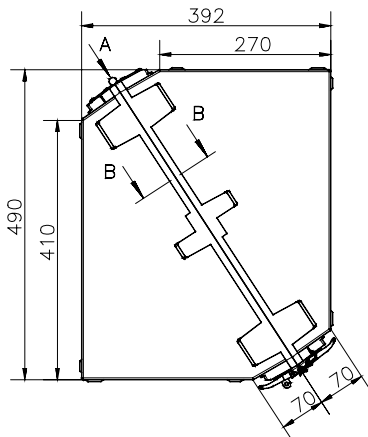


Detail: Stacking ledge

Detail B-B: Sealing Strip EPDM

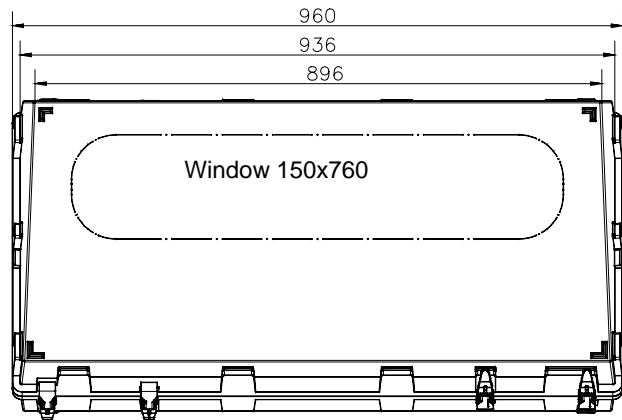

View A

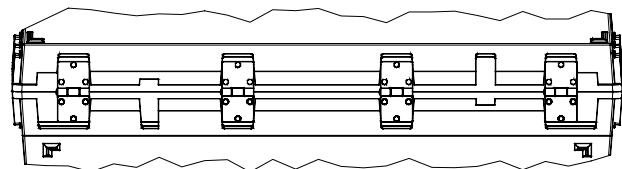

Outside Dimensions of the Enclosure - 6mm
 = Inside Dimensions of the Enclosure