



BASIC 150.xxx.xxx - single door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core
 Textured surface in grey RAL 7032
 Protection class IP 65

Vertical c-rails provided at the rear wall
 Door with 3-point locking device and burglary-resistant swing handle with profile cylinder to DIN 18252

Arrangement


Floor: Sandwich-floor with PU-foam core 25 mm (standard)

- Upon special request: GRP 5 mm
- GRP 5 mm with opening size (see data sheet SD525-xe, floor version C BASIC)

- FA/FS** Acrylic glass/ Safety glass window
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening
- WA** Wall fastening inside/ outside
- SZ** Ground vault for installation in the ground

Options

- MP** Mounting plate

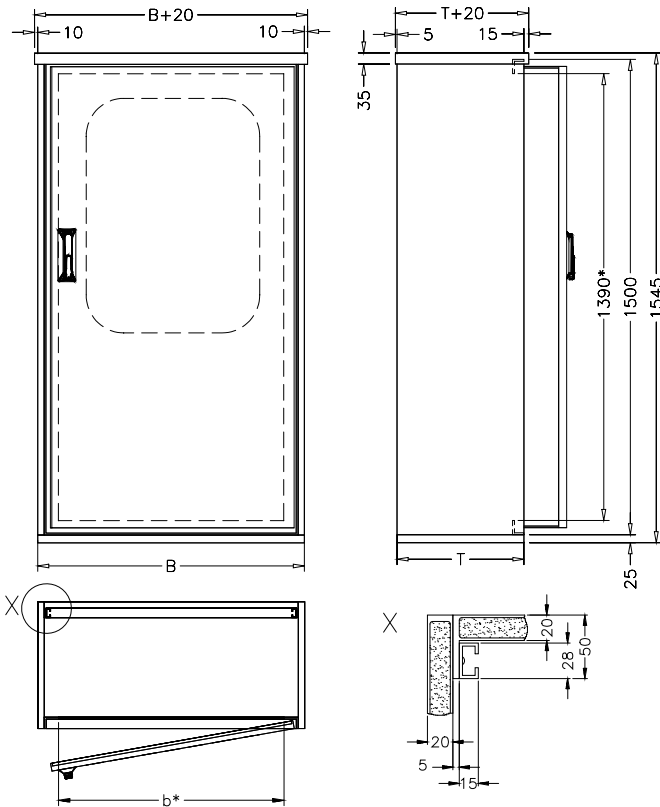

* clear width

Type	Sizes (mm) with floor			
	H	B	b	T
150.040.030	1545	440	290	300
150.040.040				400
150.040.060				600
150.040.080				800
150.040.100				1000
150.060.030	1545	640	490	300
150.060.040				400
150.060.060				600
150.060.080				800
150.060.100				1000

Type	Sizes (mm) with floor			
	H	B	b	T
150.080.030	1545	840	690	300
150.080.040				400
150.080.060				600
150.080.080				800
150.080.100				1000
150.100.030	1545	1040	890	300
150.100.040				400
150.100.060				600
150.100.080				800
150.100.100				1000