



BASIC 200.125.xxx - double door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core
 Textured surface in grey RAL 7032
 Protection class IP 54
 Vertical c-rails provided at the rear wall

Door with 3-point locking device and burglary-resistant swing handle with profile cylinder to DIN 18252
 Basquil-locking-device for left door and overlapflange of stainless steel

Arrangement


Floor: Sandwich-floor with PU-foam core 25 mm (standard)

- Upon special request: GRP 5 mm
- GRP 5 mm with opening size (see data sheet SD525-xe, floor version C BASIC)

- FA/FS** Acrylic glass/ Safety glass window
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening
- WA** Wall fastening inside/ outside
- SZ** Ground vault for installation in the ground

Options

- MP** Mounting plate

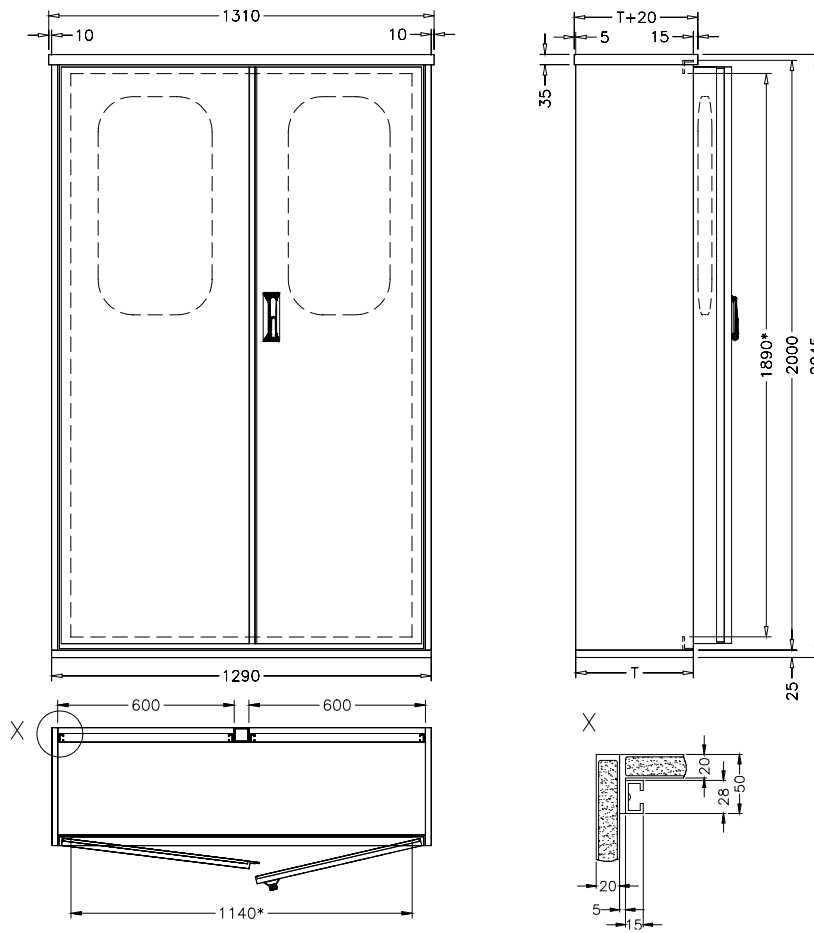

* clear width

| Type | Sizes (mm) with floor | | |
|-------------|-----------------------|------|-----|
| | H | B | T |
| 200.125.030 | 2045 | 1290 | 300 |
| 200.125.040 | | | 400 |
| 200.125.060 | | | 600 |
| 200.125.080 | | | 800 |