

Peppers Cable Glands Limited

Stanhope Road, Camberley, Surrey, GU15 3BT United Kingdom
 Telephone: +44 (0) 1276 64232 • Facsimile: +44 (0) 1276 691752
 Email: sales@peppers.co.uk • Website: www.cableglands.com



Cable Gland Type UL-U (for Unarmoured Cables)

Class I Div 2 : Ex d : Ex e : Ex nR : Ex ta : IP66 : IP68


Part Numbers:

U	L	U	B
			S



"UL-U" type glands, certified Explosion Proof Class I Div 2, Gas Groups ABCD, Flameproof Ex d, Increased Safety Ex e & Restricted Breathing Ex nR are suitable for use in Zone 1, Zone 2, Zone 21, Zone 22, Group I Mining, Gas Groups IIA, IIB, IIC and Dust Groups IIIA, IIIB, IIIC. Occasionally referred to as "potting glands", they provide a compound barrier Ex d & IP seal on the cable inner cores, eliminating damage to cables that exhibit "cold flow" characteristics and an environmental seal on the outer sheath. The gland is UL listed for Marine Shipboard Unarmoured, Jacketed or Non Jacketed cable. The unique features include, Peppers T-1000, the sealing compound that enables a quick and easy installation. The gland is rated NEMA 4X, maintains IP66, IP68 to 100 metres and is deluge proof without the use of an additional seal or deluge boot.

Compliance	UL2225 & UL514B												
Standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-15, EN 60079-31 IEC 60079-0, IEC 60079-1, 60079-7, IEC 60079-15, IEC 60079-31 & IEC 60529												
Certification:	<table border="0"> <tr> <td>UL</td> <td>Class I, Division 2, Gas Groups ABCD</td> </tr> <tr> <td>ATEX</td> <td>I M2 II 2GD Ex d I Mb & IIC Gb / Ex e I Mb & IIC Gb / Ex ta IIIC Da II 3GD Ex nR IIIC Gc</td> </tr> <tr> <td>IECEX</td> <td>Ex d I Mb & IIC Gb / Ex e I Mb & IIC Gb / Ex ta IIIC Da / Ex nR IIIC Gc</td> </tr> <tr> <td>GOST-R</td> <td>Ex d I & IIICU / Ex e IIU</td> </tr> <tr> <td>ABS</td> <td>1-1-4/7.7, 4-8-3/1.7, 4-8-3/13 and 4-8-4/27.5 MODU Rules 4-3-3/9</td> </tr> <tr> <td>LLOYD'S</td> <td>Enclosure Systems (Part 1B)</td> </tr> </table>	UL	Class I, Division 2, Gas Groups ABCD	ATEX	I M2 II 2GD Ex d I Mb & IIC Gb / Ex e I Mb & IIC Gb / Ex ta IIIC Da II 3GD Ex nR IIIC Gc	IECEX	Ex d I Mb & IIC Gb / Ex e I Mb & IIC Gb / Ex ta IIIC Da / Ex nR IIIC Gc	GOST-R	Ex d I & IIICU / Ex e IIU	ABS	1-1-4/7.7, 4-8-3/1.7, 4-8-3/13 and 4-8-4/27.5 MODU Rules 4-3-3/9	LLOYD'S	Enclosure Systems (Part 1B)
UL	Class I, Division 2, Gas Groups ABCD												
ATEX	I M2 II 2GD Ex d I Mb & IIC Gb / Ex e I Mb & IIC Gb / Ex ta IIIC Da II 3GD Ex nR IIIC Gc												
IECEX	Ex d I Mb & IIC Gb / Ex e I Mb & IIC Gb / Ex ta IIIC Da / Ex nR IIIC Gc												
GOST-R	Ex d I & IIICU / Ex e IIU												
ABS	1-1-4/7.7, 4-8-3/1.7, 4-8-3/13 and 4-8-4/27.5 MODU Rules 4-3-3/9												
LLOYD'S	Enclosure Systems (Part 1B)												
Certificate No.	<table border="0"> <tr> <td>UL</td> <td>File No. E248936</td> </tr> <tr> <td>ATEX</td> <td>SIRA 09ATEX1066X & SIRA 09ATEX4124X</td> </tr> <tr> <td>IECEX</td> <td>SIR 09.0033X</td> </tr> <tr> <td>GOST-R</td> <td>POCC GB.ГБ06.В00853</td> </tr> <tr> <td>ABS</td> <td>09-LD463991A-PDA</td> </tr> <tr> <td>LLOYD'S</td> <td>10/00056</td> </tr> </table>	UL	File No. E248936	ATEX	SIRA 09ATEX1066X & SIRA 09ATEX4124X	IECEX	SIR 09.0033X	GOST-R	POCC GB.ГБ06.В00853	ABS	09-LD463991A-PDA	LLOYD'S	10/00056
UL	File No. E248936												
ATEX	SIRA 09ATEX1066X & SIRA 09ATEX4124X												
IECEX	SIR 09.0033X												
GOST-R	POCC GB.ГБ06.В00853												
ABS	09-LD463991A-PDA												
LLOYD'S	10/00056												
IP Rating:	IP66 & IP68 (100 metres - 7 Days), NEMA 4X & DTS01 1991												
Operating Temperature:	<table border="0"> <tr> <td>UL</td> <td>-25°C to +85°C</td> </tr> <tr> <td>ATEX / IECEX</td> <td>-60°C to +135°C</td> </tr> </table>	UL	-25°C to +85°C	ATEX / IECEX	-60°C to +135°C								
UL	-25°C to +85°C												
ATEX / IECEX	-60°C to +135°C												
Materials:	Brass or Stainless Steel												
Plating:	Nickel												
Compound:	Peppers T-1000 sealing compound												
Curing Time:	@ 21°C Conductor termination can be effected after 1 hour The equipment can be energised after 4 hours-												

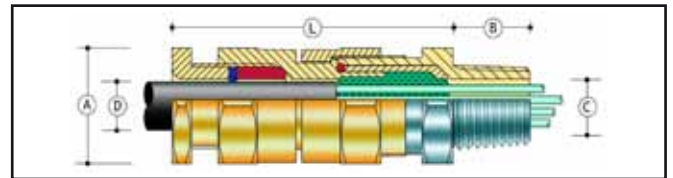

Example Part Numbering
 (See below for details) UL-UBCK1/NP/20/075NPT

UL-U	Type of gland featuring a Compound (Barrier) Inner Seal & Silicone Elastomeric Outer Seal	
B	Brass (B) / Stainless Steel (S)	
C	PVC Shroud (C) - PCP Shroud (P) - LSOH Shroud (3)	
K or V	Locknut & Nylon (K) or Fibre (V) IP Washer	
S	Including Serrated Washer	
1	Quantity per kit	
NP	Nickel Plated (NP)	
20	Gland shell size	
075NPT	3/4"NPT Entry Thread	
Optional Accessories	Locknut	Brass (ACBLN) / Stainless Steel (ACSLN)
	Earth tag	Brass (ACBET) / Stainless Steel (ACSET)
	IP Washers	Nylon (ACNSW) / Fibre (ACFSW)
	Serrated Washers	Stainless Steel (ACSSW)
	Shrouds	PVC (ACSPVC) / PCP (ACSPCP) / LSOH (ACSSIO)

CABLE GLAND SELECTION TABLE

Gland Size	Entry Thread Size		ISO Thread Length [B]	NPT Thread Length [B]	Cable Acceptance Details				Nominal Protusion Length [L]	Dimensions/Weight (NPT Entry Thread Versions)			Shroud Size
	Metric	NPT			Cable Inner Sheath [C]		Cable Outer Sheath [D]			Across Flats	Across Corners [A]	Weight (lbs)	
					Number of Cores	Max Ø Over Cores	Min	Max					
16	M20 x 1.5	1/2" or 3/4"	0.630	0.783	15	0.409	0.134	0.331	2.717	1.000	1.102	0.602	EL24
20S	M20 x 1.5	1/2" or 3/4"	0.630	0.783	35	0.409	0.189	0.461	2.717	1.000	1.102	0.590	EL24
20	M20 x 1.5	1/2" or 3/4"	0.630	0.783	40	0.492	0.374	0.551	2.717	1.180	1.299	0.710	EL30
25	M25 x 1.5	3/4" or 1"	0.630	0.795	60	0.701	0.461	0.787	2.953	1.480	1.630	1.120	EL38
32	M32 x 1.5	1" or 1 1/4"	0.630	0.985	80	0.925	0.713	1.035	3.425	1.810	1.992	1.797	EL46
40	M40 x 1.5	1 1/4" or 1 1/2"	0.630	1.008	130	1.134	0.890	1.268	3.543	2.170	2.382	2.577	EL55
50S	M50 x 1.5	2"	0.630	1.059	200	1.346	1.110	1.504	3.937	2.560	2.815	3.770	EL65
50	M50 x 1.5	2"	0.630	1.059	400	1.551	1.303	1.736	3.937	2.560	2.815	3.263	EL65
63S	M63 x 1.5	2 1/2"	0.748	1.571	400	1.764	1.547	1.972	3.937	3.150	3.465	6.190	EL80
63	M63 x 1.5	2 1/2"	0.748	1.571	425	1.969	1.839	2.205	3.937	3.150	3.465	5.309	EL80
75S	M75 x 1.5	3"	0.748	1.634	425	2.181	2.059	2.441	3.937	3.760	4.134	6.960	EL104
75	M75 x 1.5	3"	0.748	1.634	425	2.394	2.283	2.677	3.937	3.760	4.134	6.490	EL104

All dimensions in inches - [Convert to millimetres (mm) multiply by 25.4] - [Convert to kilograms (Kgs) multiply by 0.4536]

Notes:

- * Gland size does not necessarily equate to the entry thread size.
- * Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
- * Where glands are fitted into non-metallic Ex e enclosures they must be included within the earth circuit of the system.
- * The user should seek expert advice if intending to combine flammable and combustible dust in one environment/installation.
- * Assembly instructions must be read prior to installation and adhered to in full.
- * Peppers supply cable glands with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. They usually incorporate a thread run out according to the available machining techniques and will not have a full form thread for the entire length. Peppers will not be held responsible for clients' installations where this has not been taken into account.
- * To maintain the specified IP rating, clearance holes must be in accordance with EN 50262 Table 1 and the entry device should be suitably secured.
- * The gland is supplied with the correct amount of the two-part compound, gloves and instructions to allow one complete termination.
- * Metric versions are supplied with an IP O-ring.
- * All entry threads are nickel plated as standard.
- * Gland kits can be supplied with a PTFE IP washer in order to maintain the temperature range if required.